THE POWER OF LED LIGHT 2015

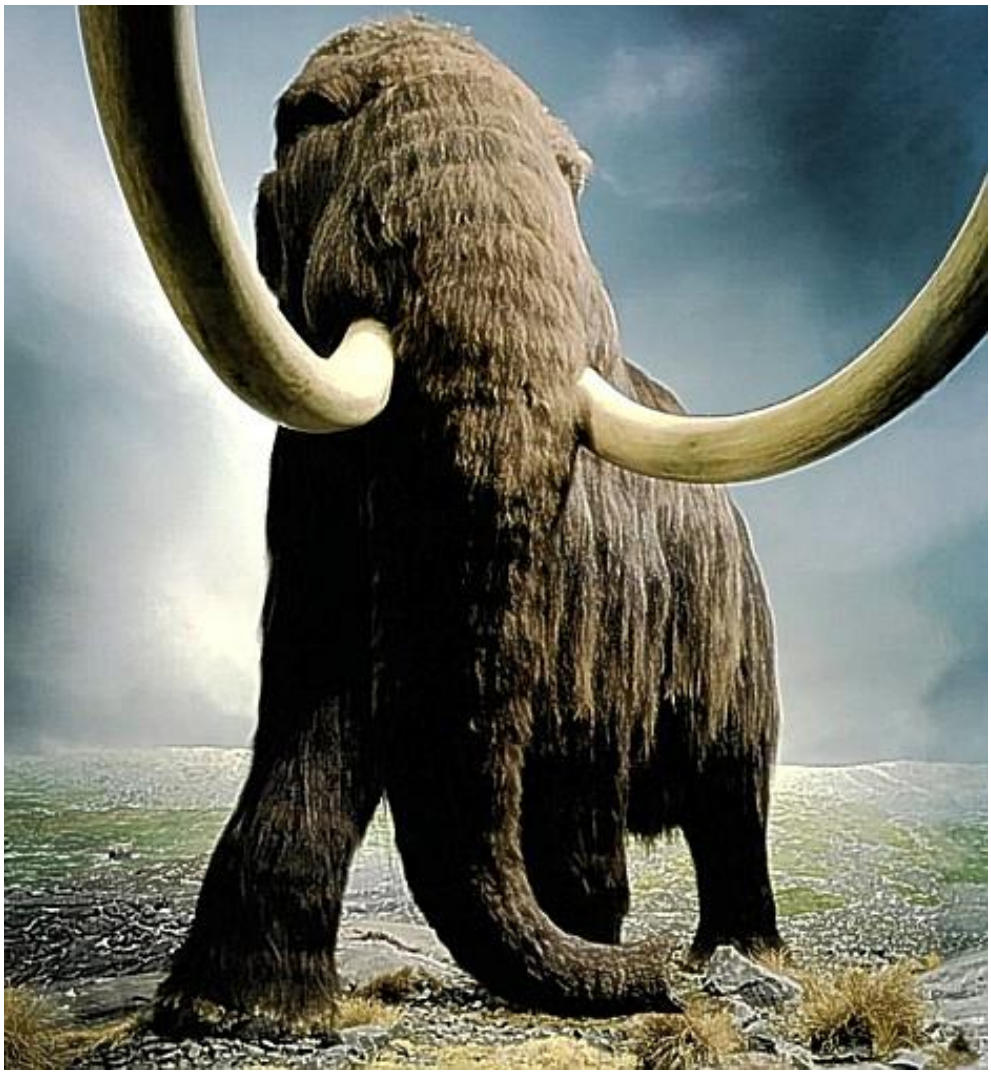

MAMOUTH

STERK IN LEDVERLICHTING

TABLE OF CONTENTS

TABLE OF CONTENTS 2
GARDEN GROUND LED SPOT 3
MONCTON R 4
MONCTON S 4
REGINA 4
GARDEN SPIKE LED SPOT 5
HALTON 6
HALTON PIN 6
REGINA PIN 6
GARDEN led POLE 7
kingston garden POLE ALU 8
kingston garden POLE ALU black 9
PROJECTION LED LIGHT 10
FLAT DESIGN PROJECTION LED LIGHT 11
ND PROJECTION LED LIGHT 14
MANTY PRO PROJECTION LED LIGHT 15
HIGHBAY LED LIGHT 17
highbay DAYVIEW LED LIGHT 18
STREET LED LIGHT 20
STREET MANTY LED LIGHT 21
DAYTROFFER LED LIGHT 23
DAYTROFFER LED LIGHT 24
SHOP LED LIGHT 25
POWERLED SHOPPER 26
VEHICLE WORK LED LIGHT 27
RECHARGEABLE WORK LED LIGHT 28
ACCESSORIES 29

GARDEN GROUND LED SPOT

MONCTON R

RECESSED GROUND SPOT ROUND 2W

MAGS.0002.30

Power consumption	2W
Lumen	119
Color temperature	3000K
Light source	COB
Beam angle	30°
Input Voltage	230V
Dimmable	No
IP Rating	IP67
Dimensions	Φ55x82mm
Housing	Inox 316 trim

MONCTON S

RECESSED GROUND SPOT SQUARE 2W

MAGS.4002.30

Power consumption	2W
Lumen	119
Color temperature	3000K
Light source	COB
Beam angle	30°
Input Voltage	230V
Dimmable	No
IP Rating	IP67
Dimensions	Φ55x82mm
Housing	Inox 316 trim

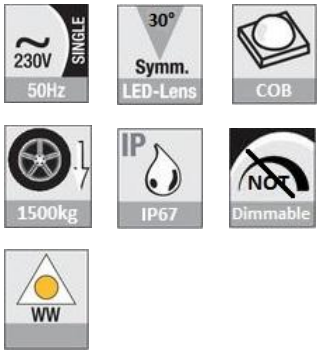

REGINA

RECESSED GROUND SPOT ROUND 6W

MAGS.0000.00

Power consumption	6W
Lumen	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	60°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP67
Dimensions	Φ116x88mm
Housing	Inox 316 trim

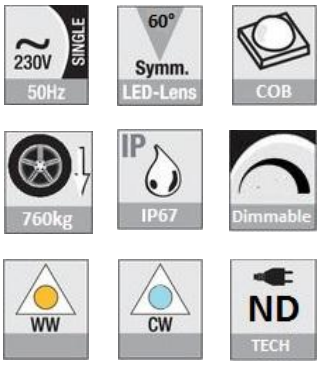

GARDEN SPIKE LED SPOT

HALTON

GROUND SPOT ROUND 2W

MAGV.0003.30

Power consumption	2W
Lumen	140
Color temperature	WW
Light source	COB
Beam angle	30°
Input Voltage	230V
Dimmable	No
IP Rating	IP65
Dimensions	Φ42x85mm
Housing	Alu



HALTON PIN

SPIKE SPOT ROUND 2W GARDEN PIN INCLUDED

MAGP.0003.30

Power consumption	2W
Lumen	140
Color temperature	WW
Light source	COB
Beam angle	30°
Input Voltage	230V
Dimmable	No
IP Rating	IP65
Dimensions	Φ42x295mm
Housing	Alu black



REGINA PIN

SPIKE SPOT ROUND 6W GARDEN PIN INCLUDED

MAGP.0000.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	60°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	Φ100x298mm
Housing	Inox 316 trim

GARDEN LED POLE

KINGSTON GARDEN POLE ALU

KINGSTON 6W ALU 30CM

MAGP.6030.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x300mm
Housing	Alu

KINGSTON 6W ALU 52CM

MAGP.6052.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x520mm
Housing	Alu

KINGSTON 6W ALU 84CM

MAGP.6084.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x840mm
Housing	Alu

KINGSTON GARDEN POLE ALU BLACK

KINGSTON 6W ALU BLACK 30CM

MAGP.7030.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x300mm
Housing	Alu black

KINGSTON 6W ALU BLACK 52CM

MAGP.7052.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x520mm
Housing	Alu black

KINGSTON 6W ALU BLACK 84CM

MAGP.7084.00

Power consumption	6W
Lumen:	420
Color temperature	2700 / 3000 / 6000K
Light source	ND COB
Beam angle	360°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	120x64x840mm
Housing	Alu black

PROJECTION LED LIGHT

FLAT DESIGN PROJECTION LED LIGHT

FLAT DESIGN LIGHT 10W

MFFL.0010.30/45

Power consumption	10W
Lumen	700 - 800
Color temperature	3000 / 4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	158x132x53mm
Housing color	Black

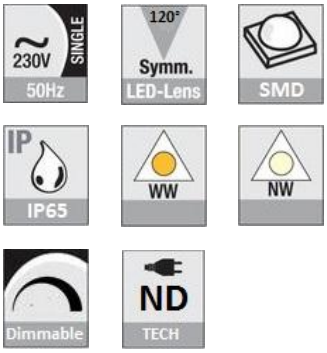

FLAT DESIGN LIGHT 20W

MFFL.0020.30/45/60

Power consumption	20W
Lumen	1600 - 1800 - 2000
Color temperature	3000 / 4500 / 6000K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	200x172x57mm
Housing color	Black

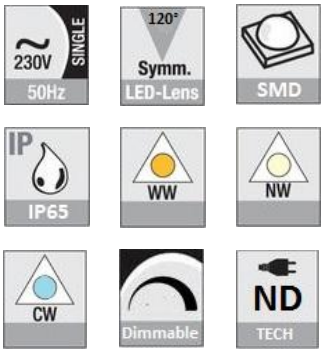

FLAT DESIGN LIGHT 30W

MBEA.0030.30/45

Power consumption	30W
Lumen	2400 - 2700
Color temperature	3000 / 4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	200x189x72mm
Housing color	Black

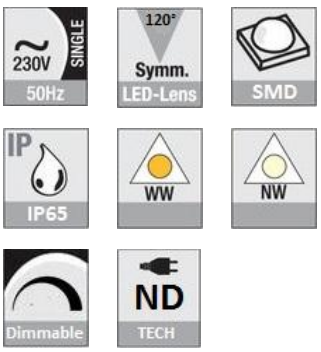

FLAT DESIGN LIGHT 50W

MFFL.0050.45

Power consumption	50W
Lumen	4250
Color temperature	4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	282x207x102mm
Housing color	Black

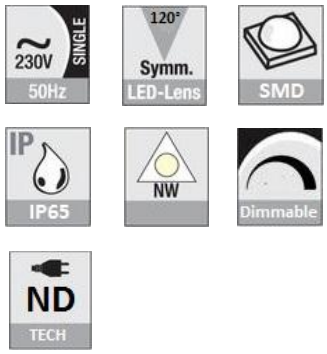

FLAT DESIGN LIGHT 70W

MFFL.0070.45

Power consumption	70W
Lumen	6300
Color temperature	4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	282x207x123mm
Housing color	Black

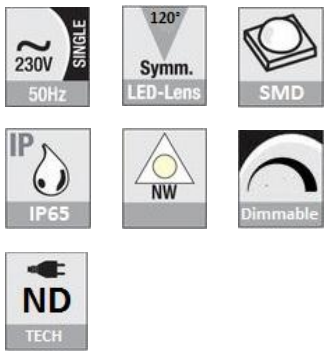

FLAT DESIGN LIGHT 100W

MFFL.0100.45

Power consumption	100W
Lumen	8500
Color temperature	4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	312x260x182mm
Housing color	Black

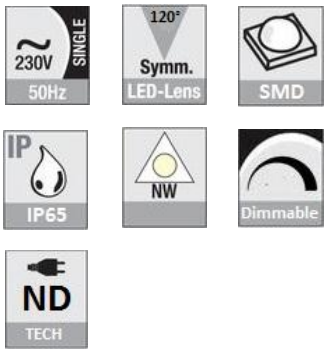

FLAT DESIGN LIGHT 150W

MFFL.0150.45

Power consumption	150W
Lumen	12750
Color temperature	4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	312x260x182mm
Housing color	Black

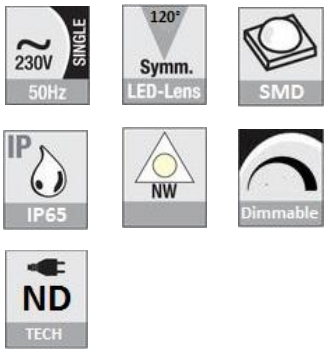

FLAT DESIGN LIGHT 200W

MFFL.0100.45

Power consumption	200W
Lumen	17000
Color temperature	4500K
Light source	LG SMD
Beam angle	120°
Input Voltage	230V
Dimmable	Yes
IP Rating	IP65
Dimensions	459x330x205mm
Housing color	Black

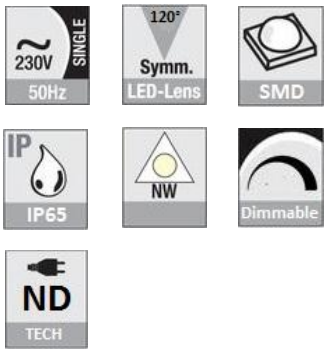

ND PROJECTION LED LIGHT

ND PROJECTION LIGHT 40W

MAND.0040.45

Power consumption	40W
Lumen:	2800 - 3000
Color temperature	4500 / 6000K
Light source	ND COB
Beam angle	120°
Input Voltage	240V
IP Rating	IP65
Weight	2.7kg
Dimensions	240x185x80mm
Housing color	Black

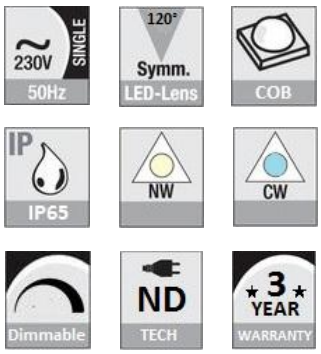

ND PROJECTION LIGHT 80W

MAND.0080.45

Power consumption	80W
Lumen:	5500
Color temperature	NW
Light source	ND COB
Beam angle	120°
Input Voltage	240V
IP Rating	IP65
Weight	4.7kg
Dimensions	290x230x90mm
Housing color	Black

ND PROJECTION LIGHT 120W

MAND.0120.45

Power consumption	120W
Lumen:	8000
Color temperature	NW
Light source	ND COB
Beam angle	120°
Input Voltage	240V
IP Rating	IP65
Weight	6.7kg
Dimensions	375x310x120mm
Housing color	Black

MANTY PRO PROJECTION LED LIGHT

MANTY PRO LIGHT 40W

MAFL.0040.45 / 60

Power consumption	40W
Lumen:	4400
Color temperature	6000K
Light source	High Power Led
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	3.5kg
Dimensions	151x303x183mm
Housing color	Black

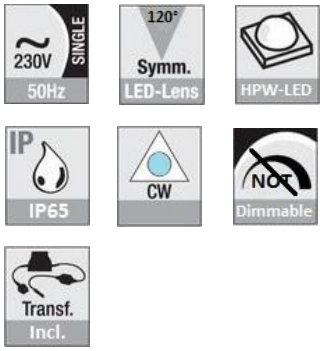

MANTY PRO LIGHT 80W

MAFL.0080.45 / 60

Power consumption	80W
Lumen:	8800
Color temperature	6000K
Light source	High Powerled
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	5.2kg
Dimensions	232x303x183mm
Housing color	Black

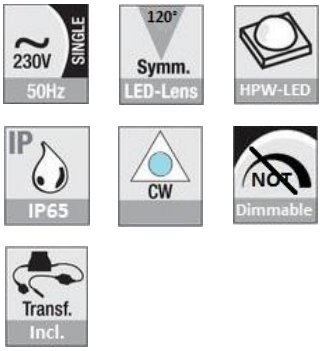

MANTY PRO LIGHT 120W

MAFL.0120.45 / 60

Power consumption	120W
Lumen:	13200
Color temperature	6000K
Light source	High Powerled
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	6.2kg
Dimensions	313x303xx196mm
Housing color	Black

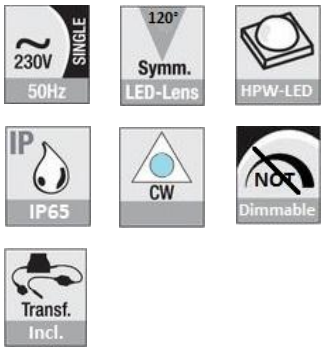

MANTY PRO LIGHT 200W

MAFL.0200.45 / 60

Power consumption	200W
Lumen:	22000
Color temperature	6000K
Light source	Powerled
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	8.5kg
Dimensions	475x303x196mm
Housing color	Black

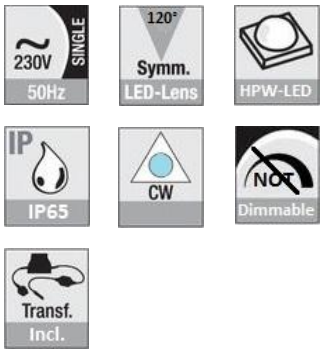

MANTY PRO LIGHT 280W

MAFL.0280.45 / 60

Power consumption	280W
Lumen:	30800
Color temperature	6000K
Light source	Powerled
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	10.5kg
Dimensions	637x303x196mm
Housing color	Black

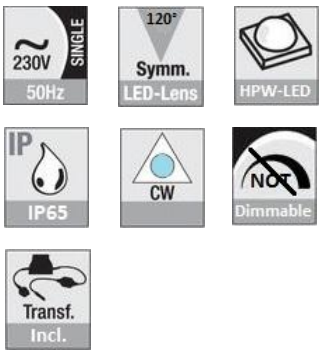

MANTY PRO LIGHT 550W

MAFL.0550.45 / 60

Power consumption	550W
Lumen:	49500
Color temperature	6000K
Light source	Powerled
Beam angle	120°
Driver	Mean Well
Input Voltage	240V
IP Rating	IP65
Weight	16kg
Dimensions	340x486x404mm
Housing color	Black

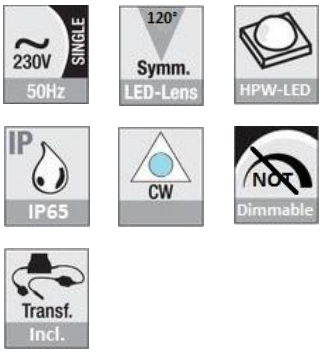

HIGHBAY LED LIGHT

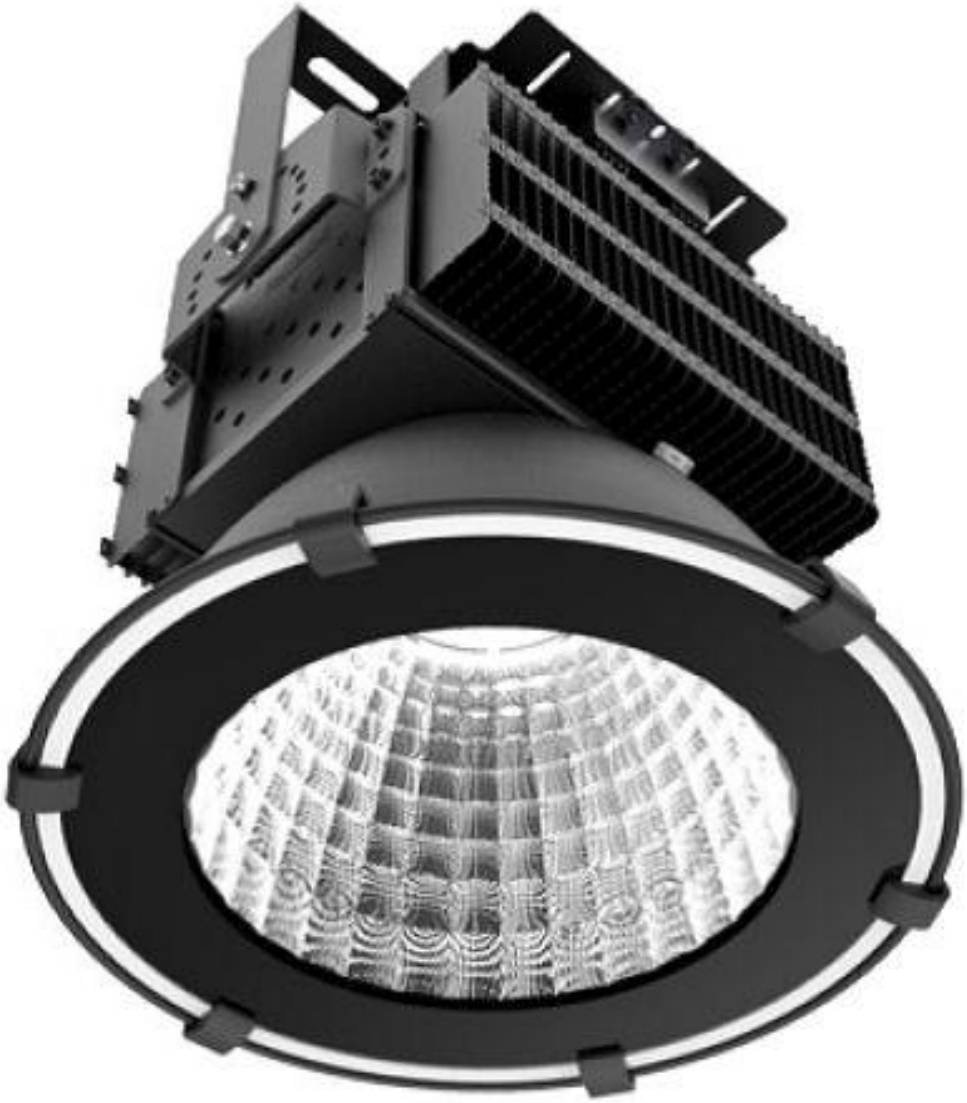

HIGHBAY DAYVIEW LED LIGHT

HIGHBAY DAYVIEW 120W

MIKA.0120.45 / 60

Power consumption	120W
Lumen:	12240
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	3.8kg
Dimensions	574x Φ 420mm
Housing color	Black

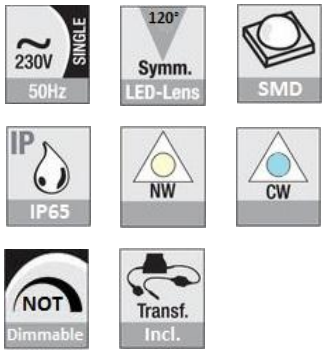

HIGHBAY DAYVIEW 150W

MIKA.0150.45 / 60

Power consumption	150W
Lumen:	15300
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	6.5kg
Dimensions	604x Φ 420mm
Housing color	Black

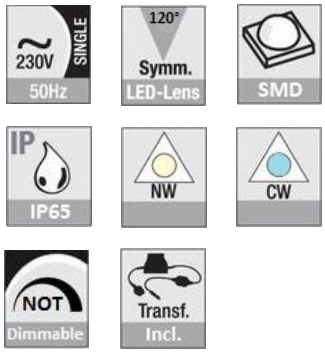

HIGHBAY DAYVIEW 200W

MIKA.0200.45 / 60

Power consumption	200W
Lumen:	18000
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	6.5kg
Dimensions	604x Φ 420mm
Housing color	Black

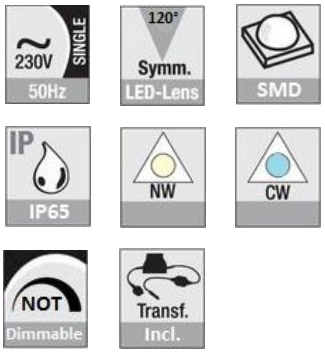

HIGHBAY DAYVIEW 400W

MIKA.0400.45 / 60

Power consumption	400W
Lumen:	22000
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
Driver	Mean Well
IP Rating	IP65
Weight	9.8kg
Dimensions	602x420mm
Housing color	Black

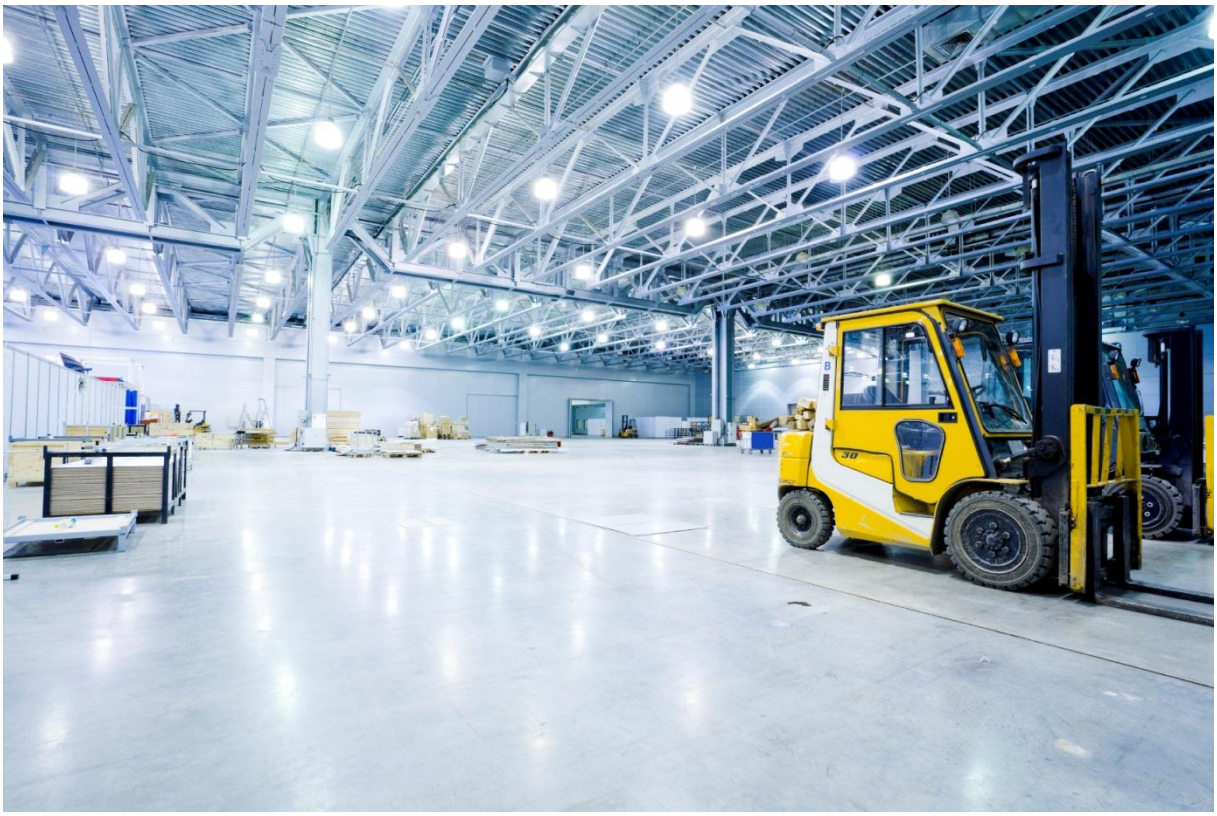

STREET LED LIGHT

STREET MANTY LED LIGHT

STREET MANTY 40W PS CREE LED

MASL.0040.60

Power consumption	40W
Lumen:	4400
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	3.5kg
Dimensions	151x303x183mm
Housing color	Dark grey

STREET MANTY 80W PS CREE LED

MASL.0080.60

Power consumption	80W
Lumen:	8800
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	5.15kg
Dimensions	232x303x183mm
Housing color	Dark grey

STREET MANTY 120W PS CREE LED

MASL.0120.60

Power consumption	120W
Lumen:	13200
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	6.15kg
Dimensions	313x303x196mm
Housing color	Dark grey

STREET MANTY 160W PS CREE LED

MASL.0160.60

Power consumption	160W
Lumen:	17600
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	7.1kg
Dimensions	394x303x196mm
Housing color	Dark grey

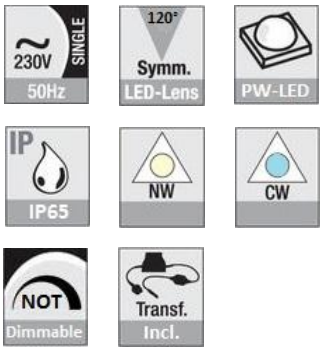

STREET MANTY 200W PS CREE LED

MASL.0200.60

Power consumption	200W
Lumen:	22000
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	8.3kg
Dimensions	475x303x196mm
Housing color	Dark grey

STREET MANTY 240 PS CREE LED

MASL.0240.60

Power consumption	240W
Lumen:	26400
Color temperature	NW / CW
Light source	Cree Power Leds
Beam angle	120°
Input Voltage	230V
IP Rating	65
Weight	9.5kg
Dimensions	556x303x196mm
Housing color	Dark grey

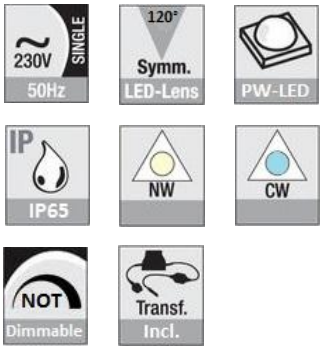

DAYTROFFER LED LIGHT

DAYTROFFER LED LIGHT

DAYTROFFER 40W 120CM

MIPA.0340.45 / 60

Power consumption	40W
Lumen:	3600-3800
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
IP Rating	IP65
Dimensions	1260x130x84mm
Housing color	Grey / White
Options	Dimmable 1-10V Emergency pack

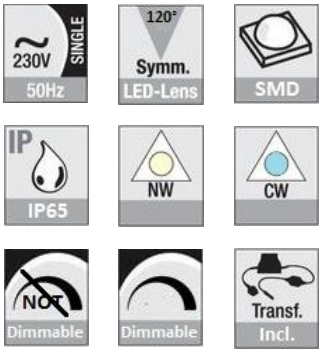

DAYTROFFER 60W 150CM

MIPA.0360.45 / 60

Power consumption	60W
Lumen:	5400-5700
Color temperature	4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
IP Rating	IP65
Dimensions	1560x130x84mm
Housing color	Grey / White
Options	Dimmable 1-10V Emergency pack

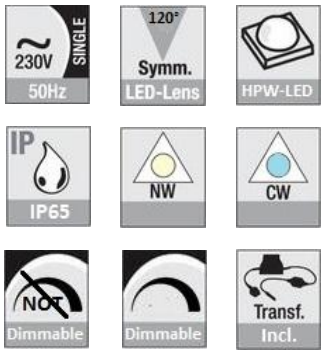

SHOP LED LIGHT

POWERLED SHOPPER

POWERLED SHOPPER 30W BUILD IN

MPLI.1030.30-60

Power consumption	30W
Lumen:	2700
Color temperature	3000 / 4500 / 6000K
Light source	SMD
Beam angle	120°
Input Voltage	240V
IP Rating	IP54
Weight	1.9kg
Dimensions	230x 145x85mm
Housing color	White

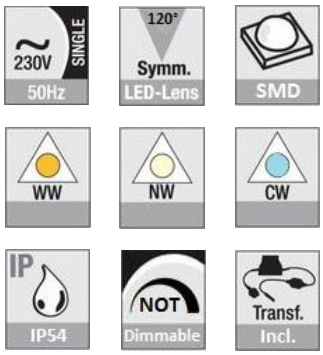

POWERLED SHOPPER 30W PROJECTION BUILD IN

MPLI.1030.30-60

Power consumption	30W
Lumen:	2700
Color temperature	3000 / 4500 / 6000K
Light source	SMD
Beam angle	25°
Input Voltage	240V
IP Rating	IP54
Weight	1.9kg
Dimensions	230x Φ145x85mm
Housing color	White

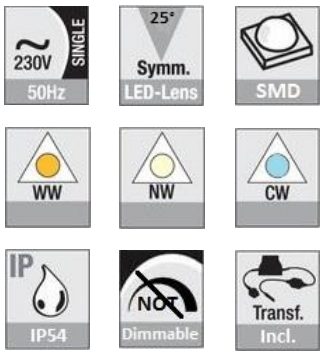

VEHICLE WORK LED LIGHT

VEHICLE WORK LIGHT LORRY 15W

MACA.0015.60

Power consumption	15W
Lumen:	1250
Color temperature	6000K
Light source	Powerleds
Beam angle	120°
Input Voltage	9-33V
IP Rating	IP67
Weight	0.75kg
Dimensions	110x 110x40mm
Housing color	Black

VEHICLE WORK LIGHT LORRY 30W

MACA.0030.60

Power consumption	30W
Lumen:	2700
Color temperature	6000K
Light source	Powerleds
Beam angle	120°
Input Voltage	9-33V
IP Rating	IP67
Weight	1.5kg
Dimensions	120x75x55mm
Housing color	Black

RECHARGEABLE WORK LED LIGHT

INSPECTION WORK LIGHT

MBFL.4020.60

Power consumption	20W
Lumen:	1800
Color temperature	6000K
Light source	COB
Beam angle	120°
Input Voltage	230V / 12V / Battery
IP Rating	IP67
Weight	1.2kg
Dimensions	120x75x55mm
Running time	Over 3 hours
Options	Over 5 hours running time



RECHARGEABLE WORK LAMP WITH MAGNETIC FEET

MBFL.4004.60

Power consumption	3W
Lumen:	180
Color temperature	6000K
Light source	(48+4) DIP-led
Beam angle	120°
Input Voltage	230V /12V
IP Rating	IP65
Weight	0.65kg
Dimensions	43x38x34mm
Housing color	Black / Red



RECHARGEABLE PROJECTION WORK LIGHT

MBFL.4020.60

Power consumption	20W
Lumen:	1800
Color temperature	6000K
Light source	COB
Beam angle	120°
Input Voltage	230V / 12V / Battery
IP Rating	IP67
Weight	1.2kg
Dimensions	120x75x55mm
Running time	Over 3 hours
Options	Over 5 hours running time



ACCESSORIES

SUPPORT DOUBLE LAMP

MATA.0001.00

Length	68cm
Housing	Black

WALL SUPPORT FOR SINGLE LAMP 0.5M

MATA.0002.00

Length	53cm

WALL SUPPORT FOR SINGLE LAMP 0.6M 45°

MATA.0003.00

Maximum height	63cm

GROUNDPIN

MATA.0004.00

Maximum height	21cm

TRIPOD ADJUSTABLE 1.5M

MATA.0015.00

Maximum height	1.5m
Housing	Black

GALVANIZED TRIPOD ADJUSTABLE 2.4M

MATA.0024.00

Maximum height	2.4m
Housing	Galvanized

JUNCTION BOX WITH CABLE GLAND

MAJB.0003.30

Dimensions	70x60x40mm
Cable entry	3
IP Rating	65
Cable gland	IP65
Cable outside Φ	Max. 10mm
Dimensions	Φ55x82mm
Housing	Flame resistant nylon + fiber

IP68 GEL FOR ELECTRICAL USE

LEVA.0300.MG

Volume	300ml
Protected Degree	IP68
Dry time	10 min

MAMOUTH

STERK IN LEDVERLICHTING

MAMOUTH YOUR PARTNER FOR: INDUSTRIAL LIGHTING

WWW.MAMOUTH.BE

DISTRIBUTION BELGIUM:

LEDCO powerleds

Grote baan 255
B-9250 Waasmunster

Phone: +32 (0)9 349 42 07
Mail: info@ledco.be
Site : www.ledco.be